

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International publication date
24 June 2004 (24.06.2004)

PCT

(10) International publication number
WO 2004/053411 A1

(51) International patent classification⁷:
I/053, F25B 39/00

F28D 1/04,

(72) Inventors; and

(75) Inventors/Applicants (US only): KASPAR, Martin [DE/DE]; Kelterstrasse 99, 73733 Esslingen (DE). WÖLK, Gerrit [DE/DE]; Olgastrasse 126, 70180 Stuttgart (DE).

(21) International application number: PCT/EP2003/012224

(22) International filing date: 3 November 2003 (03.11.2003)

(25) Language of filing: German

(74) Representative: BEHR GMBH & CO. KG; Intellectual Property, G-IP, Mauserstrasse 3, 70469 Stuttgart (DE).

(26) Language of publication: German

(30) Data relating to the priority:
102 57 767.6 10 December 2002 (10.12.2002) DE

(81) Designated states (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.


(71) Applicant (for all designated States except US): BEHR GMBH & CO. KG [DE/DE]; Mauserstrasse 3, 70469 Stuttgart (DE).

[continued on next page]

As printed

(54) Title: HEAT EXCHANGER

(54) Bezeichnung: WÄRMEÜBERTRAGER

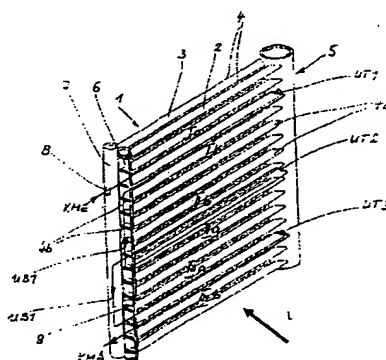

WO 2004/053411 A1

(57) Abstract: The invention relates to a heat exchanger, especially a condenser or a gas cooler for air conditioning installations, especially for motor vehicles, said heat exchanger comprising at least two rows (2,3) of flow channels through which coolant can flow and which are received at the ends thereof by manifolds (5,6,7), and ribs which are arranged between the flow channels and over which air can flow. According to the invention, individual flow channels are arranged in a row, at least two rows (2,3) of flow channels (4) are divided into at least two blocks (1,11) in one plane, and each block is divided into at least two segments (1a, 1b; 11a, 11b) of flow channels (4), perpendicularly to the planes of the heat exchanger. Said segments deviate perpendicularly to the planes (UT1, UT2), or in the plane (UB1, UB2), or deviate both in the plane and perpendicularly to the plane (UBT1, UBT2).

(57) Zusammenfassung: Die Erfindung betrifft einen Wärmeübertrager, insbesondere einen Kondensator oder Gaskühler für Klimaanlage, insbesondere für Kraftfahrzeuge, mit mindestens zwei Reihen (2,3) von Strömungskanälen, die von Kältemittel durchströmbar und endseitig in Sammelrohren (5,6,7) aufgenommen sind, mit zwischen den Strömungskanälen angeordneten, von Luft überströmten Rippen, wobei einzelne Strömungskanäle in